

JOB \_\_\_\_\_ ITEM # \_\_\_\_\_ QTY # \_\_\_\_\_

### MODEL NUMBER

- 912                       2-2128  
 918                      (Dolly for 912)  
 922



2-Model 912 with optional Dolly (2-2128) and chest handle

922

912  
Shown with optional chest handle



### PIPER'S SUPERIOR FOUNDATION

Featured on our toughest racks: Two 14 gauge aluminized steel reinforcing channels support our .125" thick aluminum bottom panel. The edges are formed and rolled to create a built-in bumper and heavy duty plate casters make this the strongest foundation in the industry.

Piper Stackable Cabinets form a handy modular system that provides unmatched versatility, space efficiency and food management options. Easily stacked on top of each other, the cabinets' unique design keeps them securely together. When used on a dolly, these cabinets offer the modular flexibility that allows you to segregate menu items, even hot and cold, for service or delivery.

### DIMENSIONS

- ◆ 912                      H20-1/2" x W 21" x D27-3/8"
- ◆ 918                      H34-3/4" x W21" x D27-3/8"
- ◆ 922                      H40-3/4" x W21" x D27-3/8"
- ◆ 2-2128                H7-3/4" x W21-3/4" x D28-3/8"

### HEAVY-DUTY CASTERS

- ◆ Casters standard on 918, 922, and 2-2128.
- ◆ 5" diameter x 1/4" wide swivel sealed wheels, two with brakes.
- ◆ 350 lb. capacity
- ◆ Maximum resistance to chemicals, acids, bases, alcohol, water and steam
- ◆ Maximum low temperature flexibility or superior performance even in freezing temperatures

### STANDARD FEATURES

- ◆ Base is a solid bottom constructed of .125" aluminum, option for full perimeter bumper
- ◆ Two 14-gauge aluminized steel reinforcing channels attach the casters and support the bottom panel (On 2-2128, 918, & 922 models)
- ◆ Frame consist of four extruded channels 1-1/2" x 5/8" x .094" aluminum. Corners have .190 channel supports for reinforcement
- ◆ Double pan top constructed of two .080" thick aluminum panels, fully welded corners
- ◆ Glides are channels spaced on 1-1/2" centers with 5/8" ledge, .090 thick extruded aluminum continuously welded to the frame
- ◆ Door panel is .125" PVC coated aluminum attached to cabinet with bakery hinges, 270 degree door swing
- ◆ Back panel is .080" aluminum fully welded
- ◆ 1/2" extruded aluminum tie bar keeps cabinet square
- ◆ 16-gauge stainless steel positive gravity latch is provided to keep door closed during transport
- ◆ Stainless steel side door latch holds door open
- ◆ One inch insulation surround the cabinet (Insulated models only)
- ◆ Card clip, easy identification of cabinet content when door is closed

### COMMON OPTIONS

- ◆ Wheel brakes
- ◆ Push handle
- ◆ Corner or perimeter bumper
- ◆ Personalized embossment
- ◆ Canned heat tray insert
- ◆ See reverse side for additional options


### WARRANTY

- ◆ One year parts and labor. Warranty is detailed on inside front cover of the price list.

**SPEC J-5**

**PIPER PRODUCTS**  
 BUILT TO LAST  
[www.piperonline.net](http://www.piperonline.net)

300 S. 84th Avenue  
 Wausau, WI 54401  
 Phone: 800-544-3057  
 Fax: 715-842-3125

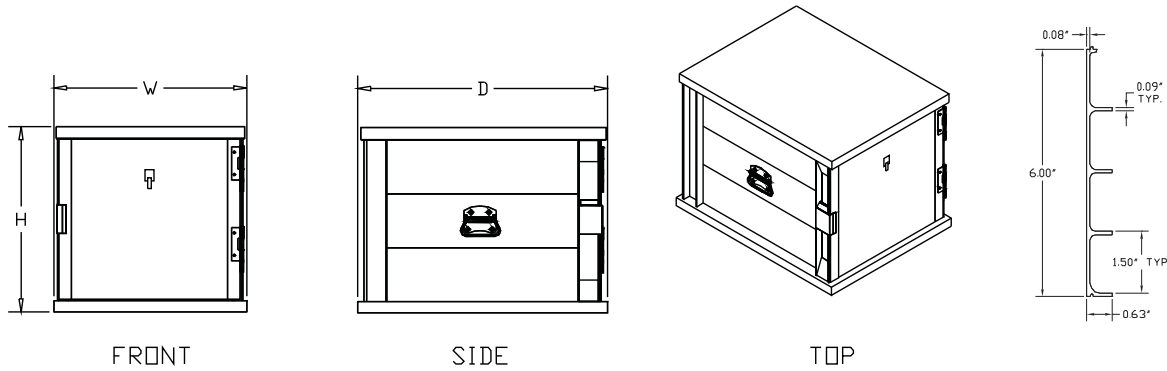

Model#	Description	Height Inches	Width Inches	Depth Inches	Channel Spacing (in.)	18x26 Tray Capacity	Ship Wt. (lbs)
912	Stackable Cabinet	20-1/2"	21"	27-3/8"	1.5	12	70
918	Cabinet	34-3/4"	21"	27-3/8"	1.5	18	96
922	Cabinet	40-3/4"	21"	27-3/8"	1.5	22	100
2-2128	Tray Dolly	7-3/4"	21-3/4"	28-3/8"	-	-	25

Approximate 912 box dimensions: 35" x 23" x 29"

Typical freight class: 175

### OPTIONS / ACCESSORIES

Part #	Description
<input type="checkbox"/> 2-2128	Dolly
<input type="checkbox"/> CHT-2	Canned Heat Tray Insert
<input type="checkbox"/> -LD	Lexan Full-View Door
<input type="checkbox"/> -DD	Dutch Doors
<input type="checkbox"/> -CH	Chest Handles
<input type="checkbox"/> -EMB	Personalized Embossment
<input type="checkbox"/> -PH	Push Handle
<input type="checkbox"/> -I	Insulating Transport Cabinet
<input type="checkbox"/> -B	Non-Marking Rubber Bumpers Corner (set of 4)
<input type="checkbox"/> -PB	Full Perimeter
<input type="checkbox"/> -WB	Wheel Brakes (set of 2)
<input type="checkbox"/> -5x2	Heavy-duty Casters (set of 4)
<input type="checkbox"/> -CP	Correctional Package
<input type="checkbox"/> -Y4	Polyurethane 4" casters (set of 4)
<input type="checkbox"/> -Y5	Polyurethane 5" casters (set of 4)
<input type="checkbox"/> -FL	Floor Lock
<input type="checkbox"/> -CHI	Canned heat tray insert

Dutch doors not available on 912.



### CANNED HEAT TRAY INSERT

Preheats quickly and keeps a variety of products at peak temperature for hours. Maintains 190 to 205 degrees fahrenheit for optimum food temperature. Tray holds up to two 6-hour burn containers. Tray is designed to fit inside any of our standard cabinets by resting on the existing tray glides.

### J-5 SPEC

**PIPER PRODUCTS**  
BUILT TO LAST  
[www.piperonline.net](http://www.piperonline.net)

300 S. 84th Avenue  
Wausau, WI 54401  
Phone: 800-544-3057  
Fax: 715-842-3125

**LIMITED WARRANTY:** PIPER PRODUCTS warrants to the original purchaser parts and labor for a period of twelve (12) months from the date of purchase. See manufacturer's complete warranty for details.

It is our policy to build equipment which is design certified by companies that have been accredited at the Federal Level by the Occupational Safety and Health Agency (OSHA) and ANSI as a National Recognized Testing Laboratory. These companies include CSA International, Underwriters Laboratories, and the National Sanitation Foundation. However, a continuing program of product improvement makes it necessary to submit new models to the agencies as they are developed. Consequently, all models may not bear the appropriate labels at all times.

We reserve the right to change specifications and product design without notice. Such revisions do not entitle buyer to corresponding changes, improvements, additions or replacements for previously purchased equipment. Information is not for design purposes.